

## DISPLAY TOWER 138

Optimal refrigeration starts by selecting the right refrigeration unit. Sensitive food places special demands on the refrigeration technology. Factors such as temperature and humidity are crucial for correct storage, presentation and a long product shelf life.




### Highlights

- Eye-catcher: perfect design and unique functionality
- Interior LED lighting: no light spots are visible; brightness is infinitely variable with the IDEAL AKE controller; luminous colours available from 2700 K to 6000 K for optimal illumination of the products
- All-round glazing for stand-alone placement
- 6 hooks and 5 support brackets for GN 1/1 trays for perfect product presentation
- Convection cooling system to cool down high-quality products perfectly
- High transparency thanks to energy-saving insulated glass; enormous storage capacity due to different support systems
- UV-C-disinfection

### Accessories and custom options

- RAL powder coating
- Individual interior fittings
- High-quality stainless steel design (V4A)

### Dimensions

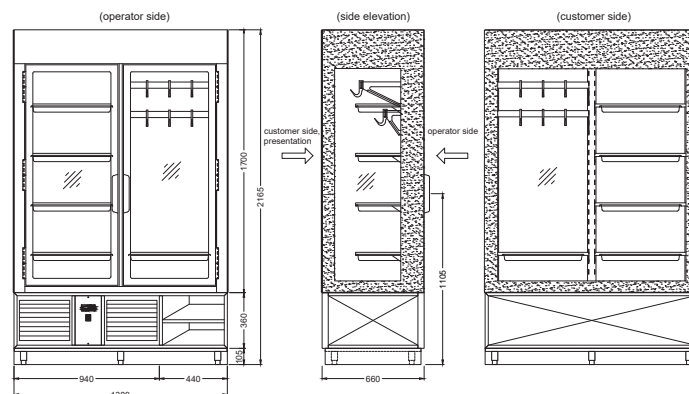

### Technical data

Item	Item no.	Dimensions (W x D x H)	Connection	Refrigerant
PT 138-U-E	80090001 80087747	1380 x 660 x 2165 mm	530 Watt – 230V 50Hz	R290 (propane)

### Temperature range



Air  
+ 2 °C



Product  
-2 °C to +5 °C